


V-PRO® PROTECTION BOARD

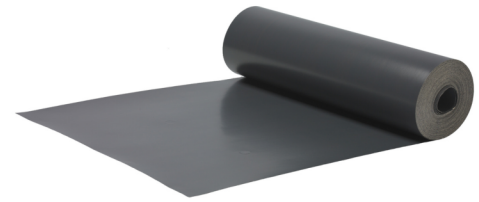

DESCRIPTION:

V-PRO® Protection Board is a robust, durable, and liquid-proof surface protection that is easy to roll out, use, and remove. Our material is derived from recycled juice boxes and milk cartons, allowing us to create a high-quality product at a very low price. It is fully resistant to water, oil, and other liquids, thanks to its composition of several layers of PE, paper, and aluminum. This gives the board high durability and impact resistance, making it ideal for long-term use in the workplace.

This product is designed for a variety of tasks including painting, plastering, moving, and construction or renovation work. It combines the benefits of traditional protection materials such as cardboard, construction film, and sheeting into a single, superior solution.

V-PRO® Protection Board is the exclusive product of Verbo, used by both professionals and consumers. Simply lay the roll on the floor and kick it out to the desired length for quick and easy application.

APPLICATION

- For all dried surfaces
- For all painting, construction, building, renovation, and remodelling work
- Lay the board down with an overlap of approximately 5 cm, securing it with tape

FEATURES

- High Durability
- Liquid Proof
- Impact Resistance
- Anti Slip Coating
- Smooth Application
- Sustainable Solution



AVAILABLE IN

538 sq.ft | 49.2-inch x 131.2-feet | ± 30 LBS
317 sq.ft | 24.6-inch x 157.5-feet | ± 18 LBS
150 sq.ft | 24.6-inch x 73.5-feet | ± 9 LBS

SPECIFICATIONS

- **Material:** Multiple layers of PE, paper, and aluminum
- **Source:** Misprinted juice box packaging/milk cartons
- **Thickness:** Approximately 17.1 mils (0.434 mm)
- **Liquid Proof:** Fully resistant to water, oil, and other liquids
- **Durability:** High impact resistance and long-lasting in the workplace
- **Applications:** All non-breathable floors such as tiles, PVC, and carpet
- **Tape:** Any tape can be used to seam the board
- **Free From:** Chemicals and added adhesives



Note: V-PRO® Protection Board is not suitable for newly laid floors such as porous stones, natural stones, clay tiles, and concrete.